


1- Cote d'encombrement

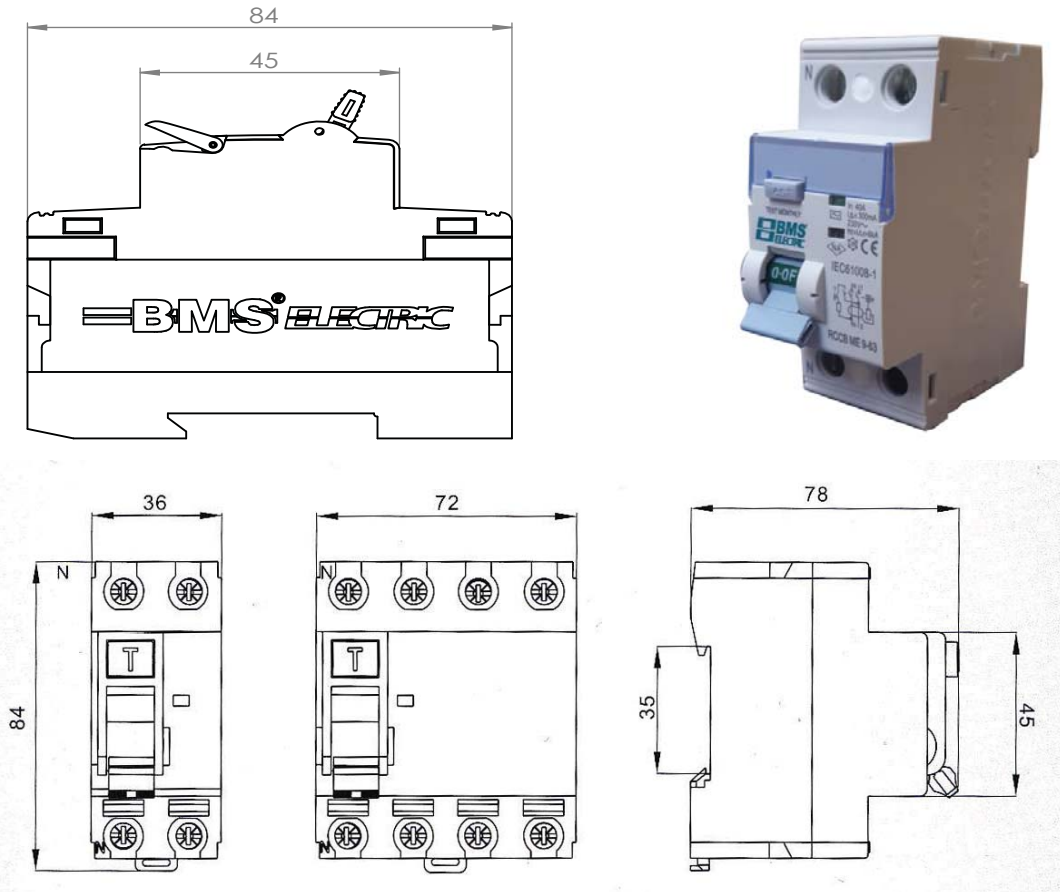

2- Caractéristiques électriques

Farms class	63 A
Rated working voltage	240/415 V
Rated frequency	50/60 Hz
Rated working current	16, 20, 25, 32, 40, 50, 63 A
Rated residual operating current	0.03, 0.1, 0.3, 0.5 A
Rated residual un-operating current	0.015, 0.05, 0.15, 0.25 A
Sensibility	A type, AC type
Rated making and breaking capacity	$I_n \leq 50A$ 500A, $I_n = 63A$ 630A
Limiting value of un-operating current	6In
Rated limiting short-circuit current	6000A
Pole number	2, 4P
Mechanical life	10000
Electrical life	4000
Température ambiante	-5° C a +40° C
Température de stockage	-40° C a +55° C


3- Raccordement

<b>Conducteurs admissibles</b>	
Souple avec embouts	1.5 à 16 mm
Rigide	1.5 à 16 mm
<b>Outils nécessaires</b>	
Tournevis lame plate	Ø 8 mm
Tournevis cruciforme	Pz 1
<b>Couple de serrage</b>	
Mini	0.8 Nm
Maxi	2 Nm

4- Branchement :

Support de montage : rail DIN 35mm  
Type de connexion : cage à vis  
Position de montage : Vertical  
Type de raccordement : bornes à vis

5- principe de l'opération

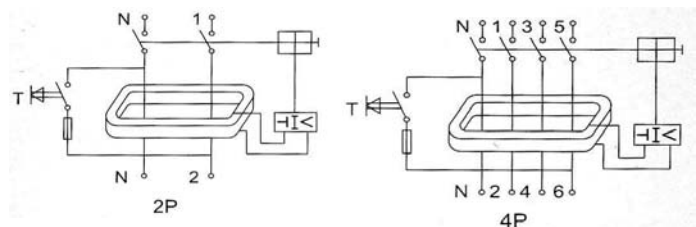

• Indice de protection

Classe II  
IP 20  
Normes : IEC/EN 61008-1 and GB 16916-1